

Super Talent - OEM Solution Provider

Headquartered in the heart of Silicon Valley, Super Talent provides OEM Customers a competitive advantage by enabling them to outsource the design, layout, manufacturing and qualification processes. Our ultimate goal is to provide innovative solutions, decrease your time to market and reduce costs.



Design

Super Talent designs are produced by a talented team of Silicon Valley engineers to satisfy most customers' data storage needs.



Manufacturing

Super Talent uses state-of-the-art ISO 9001 certified technical equipment and leading-edge components to manufacture it's memory products.



Testing

All Super Talent products are rigorously tested for quality within our own labs and then tested and approved by top motherboard manufacturers and other industry partners to assure compatibility.



Logistics

Super Talent logistic services are very flexible to meet various customer needs that include retail and bulk packaging, procurement, inventory management, transportation, and more.

2015 Product Overview



SUPER TALENT LOCATIONS INCLUDE:

- San Jose
- Los Angeles
- Chicago
- New Jersey
- Georgia
- Miami
- Brazil
- Europe
- Shenzhen
- Wuhan
- Taiwan
- Hong Kong
- Japan
- Mexico

- ⊗ Headquarters
- Sales Representative
- ⊙ Sales, Warehouse
- ◇ Sales, Purchasing
- Factory



Corporate Headquarters

United States

2077 North Capitol Avenue
 San Jose, CA 95132 U.S.A
 Tel: 1.408.934.2560
 Fax: 1.408.719.5020
 Support: support@supertalent.com
 Sales: sales@supertalent.com
 OEM Sales: oemsales@supertalent.com

SUPER ★ TALENT®
 THE BEST MEMORY

www.supertalent.com

Your Source for quality Flash
 & DRAM Storage Solutions...



SUPER ★ TALENT®
 THE BEST MEMORY

FLASH PRODUCTS

Solid State Drives	1
USB Flash Drives	9
Flash Media Cards	15

MEMORY PRODUCTS

DRAM Modules	17
Green Memory	19
Apple® Compatible Memory	20

* Patent # - USA (Protected by U.S Patents)

DDR DIMM:
5,841,686 ; 5,982,653 ; 5,996,880 ; 6,542,393 ; 6,775,139 ; 6,993,209 ; 7,023,700 ; 7,215,551 ; 7,365,985

USB Flash Drives:
6,547,130 ; 6,854,984 ; 6,874,044 ; 6,993,618 ; 7,004,780 ; 7,004,794 ; 7,021,971 ; 7,044,802 ; 7,052,287 ; 7,073,010 ; 7,074,052 ; 7,082,056 ; 7,094,074 ; 7,095,617 ; 7,103,684 ; 7,104,848 ; 7,108,560 ; 7,125,287 ; 7,126,559 ; 7,182,646 ; 7,186,147 ; 7,235,423 ; 7,243,185 ; 7,249,978 ; 7,252,518 ; 7,257,714 ; 7,259,967 ; 7,269,004 ; 7,297,024 ; 7,318,117 ; 7,428,605 ; 7,347,736 ; 7,702,831 ; 7,873,837 ; 7,966,462 ; 8,073,985 ; 8,102,657 ; 8,297,987 ; 8,438,376 ; 8,444,423 ; 8,500,467 ; 8,567,050 ; 8,625,270

Flash Cards:
6,547,130 ; 6,874,044 ; 7,009,846 ; 7,032,827 ; 7,069,369 ; 7,082,056 ; 7,103,684 ; 7,104,807 ; 7,126,873 ; 7,173,826 ; 7,174,628 ; 7,243,185 ; 7,257,714 ; 7,296,345 ; 7,299,316

Solid State Drives:
7,243,185 ; 6,547,130 ; 6,874,044 ; 7,004,780 ; 7,082,056 ; 7,073,010 ; 7,104,807 ; 7,126,873 ; 7,130,958 ; 7,243,185 ; 7,257,714 ; 7,299,316 ; 7,318,117 ; 7,849,242 ; 7,877,542 ; 7,886,108 ; 7,934,074 ; 8,015,348 ; 8,019,943 ; 8,037,234 ; 8,180,931 ; 8,266,367 ; 8,296,467 ; 8,321,597 ; 8,341,332 ; 8,452,912 ; 8,543,742

* Taiwan Patents
094106566 ; 094113217 ; 094145032 ; 096132994 ; 096136141 ; 097108510 ; 098213787 ; 99100643 ; 099109613 ; 099118012

*China Patents:
200710154015.3 ; 200910163527.5 ; 200910165874.1 ; 201010135362.3 ; 201320265197.2



Solid State Drives



Enterprise Solutions

Consumer

Mobile Computing

Industrial Grade

Embedded

USB 3.0 Flash Drives



Express Dram★Disk™

Express RC4

SuperCrypt Pro

DataGuardian

USB 3.0 Pico

Memory Products



DDR4 Memory

DDR3 Desktop Memory

Network Memory

DDR3 Server Memory

Laptop Memory

Solid State Drives - Overview

Super Talent's SSDs (solid-state drives) are data storage devices that use NAND Flash memory as the storage medium. SSDs have lower power consumption, faster performance, and are lighter and less noisy compared to conventional hard disk drives.

Utilizing high density industrial grade NAND Flash chips, Super Talent now offers a variety of SSDs for ultra-rugged applications and high performance consumer and commercial use. Super Talent's SSD technology includes proprietary wear leveling algorithms and bad bit management.



• Enterprise Solutions

- RAIDDrive SSD
- TeraDrive SSD



• Consumer

- VSSD



• Mobile Computing

- mSATA SSDs
- Mini PCIe SSDs



• Automotive & Industrial Grade

- DuraDrive SSDs



• Embedded

- Mobile Computing
- Flash Disk Modules
- IDE Flash Disk Modules

*The Broadest Portfolio
in the Industry...*



Solid State Drives - Enterprise Solutions



RAIDDrive SSD

RAIDDrive is designed to break the throughput bottleneck in the storage subsystem by removing the bandwidth limitation of the SATA bus. The PCIe x8 interface used by RAIDDrive SSDs supports 2GB/sec bandwidth which is more than ten times that of the SATA-II 3Gbps bus.

RAIDDrive III Plus

- PCIe x8 Interface
- Max Speed: Read up to 3.2GB/s, Write up to 3.2GB/s
- Capacities up to 2TB

Specification	RAIDDrive III Plus
Interface	PCIe
Form Factor	PCIe x 8 (Gen2)
Capacities	480GB-2TB
Read/Write (MB/s)	3200/3200
Dimensions (mm)	231.5 x 94.0 x 20.6
Part Number	FP8xxxL5Rx

Based on CrystalDiskMark v.3.0 and Asus P6T Motherboard. Performance may vary.



TeraDrive SSD

The TeraDrive line is Super Talent's enterprise offering that delivers exceptional performance using state-of-the-art algorithms and proprietary RAISE technology to increase reliability and endurance. Supporting up to 50,000 IOPS, the TeraDrive is ideal for database servers and represents the pinnacle of performance in enterprise storage.



Features

- SATA III Interface
- Protection for sudden power loss
- Enterprise data center solution



Specification	TeraNova
Interface	SATA-III
Form Factor	2.5"
Capacity	60GB – 480GB
Read/Write (MB/s)	540/410
Dimensions (mm)	69.85x100.0x6.9
Part Number	FTMxxN325H

VSSD

The VSSD PX1 is a SATA-III SSD from Super Talent that offers outstanding performance at a great price point. The VSSD PX1 can be built to handle extended temperature ranges from -40°C to 85°C. Encased in a metal enclosure and designed with extended thermal range components, the VSSD PX1 is engineered to perform exceptionally well for any applications.



Features

- SATA-III Interface
- Max Speed: Read up to 510 MB/s, Write up to 200 MB/s
- Capacities up to 256GB



Specification	VSSD PX1
Interface	SATA-III
Form Factor	2.5"
Capacity	32GB – 256GB
Read/Write (MB/s)	510/200
Dimensions (mm)	69.85 x 100.0 x 7.0
Part Number	FTMxxxPE2U

Garbage Collection and TRIM Support



Garbage Collection is an odd term for a feature that will keep your SSD drive running at optimum performance throughout its life and Trim is its close companion. Both features run in the background, seeking out invalid blocks of data and preparing them to be written to both quickly and efficiently. While Trim requires Operating System awareness and currently only works with Windows 7, Windows Server 2008 RC2, Linux (kernel 2.6.33+), Garbage Collection does not require OS participation and will work with everything from XP, Vista, Linux, Macintosh, you name it. All of our 2.5" SSDs support both Garbage Collection and Trim to keep your drive running at its best.



TRIM is an operating system feature in which the OS will pass down commands to an SSD controller to erase deleted pages from the SSD. When the TRIM command is enabled, it will execute automatically in the background to always keep the SSD performing like new. TRIM is generally the best method for maintaining SSD performance because it is built into the OS and happens automatically. TRIM is supported by Windows® 7 and Windows Server 2008 R2. It will be integrated into Linux in the near future. Other operating systems do not support TRIM.

mSATA SSDs



Super Talent's JEDEC MO-300 compatible mSATA SSDs are perfect for systems with limited physical space, such as tablets - all without sacrificing performance. We also offer OEM customers the opportunity to customize the length and width of the PCB boards for their specific needs.

Specification	mSATA SJ2	mSATA mini SJ2	mSATA DX1	mSATA
Interface	SATA-III	SATA-III	SATA-III	SATA-II
Form Factor	Mini PCIe	Mini PCIe	Mini PCIe	Mini PCIe
Capacities	16GB – 128GB	16GB – 64GB	16GB-128GB	16GB-128GB
Read/Write (MB/s)	300/100	300/100	450/150	160/80
Dimensions (mm)	50.8 x 29.8 x 3.5	29.85 x 26.8 x 3.5	50.8 x 29.85 x 3.5	50.8 x 29.85 x 4.85
Part Number	FM5 xxxMTRM	FM2xxxJPRM	FM5xxxJCRM	SGxxNx5SM

* Dimensions can be customized for OEMs.

Mini PCIe SSDs

Super Talent produces a selection of SSDs designed specifically for upgrading popular notebook models. Upgrading to an SSD provides shorter boot times, faster application loading, and less power consumptions.

Specification	SATA Mini 2 PCIe DX1	Half Mini 2 PCIe SM1	CoreStore Plus
Interface	SATA-III	IDE/PATA	PCIe
Form Factor	Mini PCIe	Mini PCIe	Mini PCIe
Capacity	32GB – 256GB	16GB – 128GB	16GB – 128GB
Read/Write (MB/s)	480/400	130/120	300/120
Dimensions (mm)	69.5x32.1x3.5	51.0 x 30.0 x 3.5	50.8 x 29.85 x 3.5
Part Number	FMTxxxJCRM	FERxxxMDRM	FPNxxxC2RM



Solid State Drives - Automotive & Industrial Grade



DuraDrive SSDs

Super Talent's DuraDrive SSDs represent state-of-the-art storage solutions for industrial, medical, and embedded applications. These SSDs deliver unprecedented tolerances to vibration, shock, humidity, altitude, and temperatures while maintaining impressive speeds. Our industrial grade DuraDrive line is rigorously tested.

Specification	DuraDrive AT8	DuraDrive AT7	DuraDrive AT6	DuraNova III	DuraDrive AT3
					
Interface	SATA-III	SATA-III	SATA-III	SATA-III	SATA-II
Form Factor	2.5"	2.5"	2.5"	2.5"	2.5"
Capacities	60GB – 480GB	16GB – 1TB	32GB – 256GB	64GB – 320GB	32GB-256GB
Read/Write (MB/s)	520/400	530/400	480/400	450/400	250/170
Dimensions (mm)	69.85 x 100.0 x 7.0	69.9 x 100.0 x 9.5	70.0 x 100.0 x 9.5	69.9 x 100.0 x 9.5	69.9 x 100.0 x 9.5
Part Number	FTMxxxPD2U	FTMxxxM2UP	FTMxxJB25I	FTMxxD325H	FTMxxG825I

Specification	DuraDrive ET3	DuraDrive ZT4	DuraDrive ZT3	DuraDrive KX4	DuraDrive KX3
					
Interface	IDE/PATA	IDE/ZIF-40	IDE/ZIF-40	uSATA-III	uSATA-II
Form Factor	2.5"	1.8"	1.8"	1.8" uSATA	1.8" uSATA
Capacities	16GB – 256GB	16GB – 256GB	16GB – 256GB	32GB – 512GB	32 GB – 256 GB
Read/Write (MB/s)	130/120	130/120	125/110	500/400	250/130
Dimensions (mm)	69.9 x 100.0 x 9.5	52.0 x 70.0 x 5.1	52.0 x 70.0 x 5.1	54.0 x 78.5 x 5.0	54.0 x 78.5 x 5.0
Part Number	FE8xxxMD2D	FEUxxxMD1X	FZMxxGF18H	FTRxxxMU1M	FUMxxG818H

DISCLAIMER: Actual usable memory capacity may vary. 1MB equals 1 million bytes; 1GB equals 1 billion bytes.

Embedded Mobile Computing

- Perfect for high performance mobile computing
- SATA interface SSDs based on the M.2 form factor
- DX2 features an internal cache to further speed up application load times



Super Talent's mobile computing line features small form factor storage for embedded applications. These NAND flash memory devices are ideal for use in medical equipment, point-of-sale terminals, and mobile devices.

Super Talent flash memory devices have high reliability and performance for storage media. They consume less power while being able to provide sufficient storage space to load an OS and serve as a bootable drive. Like all Super Talent products, these are built with high quality components to guarantee quality.



M.2 PCIe SSD DX2



NGFF DX2



NGFF ST3

Solid State Drives - Embedded

Flash Disk Modules

Super Talent's line of SSDs also extends to small form factor systems. NAND Flash based Flash Disk Modules (FDMs) are well suited for a wide range of industrial and embedded computing applications. Laptops, surveillance equipment, medical instruments, and even point-of-sale terminals utilize these solutions every day.

Specification	M.2 PCIe SSD DX2	NGFF DX2	NGFF ST3	NGFF ST2
				
Interface	PCIe	SATA-III	SATA-III	SATA-II
Form Factor	NGFF (M.2)	NGFF (M.2)	NGFF (M.2)	NGFF (M.2)
Capacities	32GB – 256GB	32GB – 256GB	32GB – 128GB	8GB – 128GB
Read/Write (MB/s)	550/320	480/400	480/200	300/100
Dimensions (mm)	22.0 x 80.0 x 3.5	22.0 x 80.0 x 3.5	22.0 x 42.0 x 3.5	22.0 x 42.0 x 3.5
Part Number	FN8xxxJ6RM	FN8xxxMURM	FN4xxxMURM	FN4xxxMTRM


Specification	7-pin SATA FDM SJ2	7-pin SATA DOM SJ2	22-pin SATA SJ2 Horizontal	SATA Slim SJ2	PCIe FDM DX1
					
Interface	SATA-III	SATA-III	SATA-III	SATA-III	PCIe x1 (Gen2)
Form Factor	SATA 7-pin	SATA 7-pin	SATA 22-pin	SATA 22-pin	PCIe
Capacities	8GB – 128GB	8GB – 128GB	4GB – 128GB	8GB – 128GB	64GB – 256GB
Read/Write (MB/s)	300/100	300/100	300/100	480/400	400/200
Dimensions (mm)	52.0 x 38.5 x 7.5	43.0 x 23.0 x 7.6	55.2 x 30.0 x 10.6	54.0 x 39.8 x 4.0	56.0 x 57.75 x 4.5
Part Number	FF(7/6)xxxJRRM	FDVxxxJPRM	FF8xxxJPRM	FMLxxxMURM	FP1xxxJ3RM



Solid State Drives - Embedded

IDE Flash Disk Modules

Super Talent's line of SSDs also extends to small form factor systems. NAND Flash based IDE Flash Disk Modules (FDMs) are well suited for a wide range of industrial and embedded computing applications. Laptops, surveillance equipment, medical instruments and even point-of-sale terminals utilize these solutions every day. The industry standard IDE connector plugs directly into a motherboard using a 40 or 44-pin IDE connector and uses a 5V power input.


Specification	40-pin IDE Vertical	40-pin IDE Horizontal	44-pin IDE Vertical	44-pin IDE Horizontal
				
Interface	IDE/PATA	IDE/PATA	IDE/PATA	IDE/PATA
Form Factor	FDM	FDM	FDM	FDM
Capacities	8GB – 128GB	8GB-128GB	8GB-128GB	8GB-128GB
Read/Write (MB/s)	130/120	130/120	130/120	130/120
Dimensions (mm)	49.5 x 31.0	49.5 x 31.0	48.0 x 31.0	48.0 x 31.0
Part Number	FE0xxxMDRM	FE1xxxMDRM	FE4xxxMDRM	FE5xxxMDRM

DISCLAIMER: Actual usable memory capacity may vary. 1MB equals 1 million bytes; 1GB equals 1 billion bytes.



STT USB Drives - USB 3.0 Series

Super Talent is committed to the USB 3.0 standard and offers a large selection of USB 3.0 flash drives. Whether you need speed, style, security, or affordability, you'll find the right drive for you at Super Talent.

 <p>Express Dram★Disk™ A solid combination of extreme speed and usability. *Software Included. - Capacities: 8 - 64 GB - Read Speed: 4041 MB/s - Write Speed: 5388 MB/s</p> <p>■ ■</p>	 <p>Express RC4 4-CH SSD performance - Capacities: 32 -256 GB - Read speed: 320 MB/s - Write speed: 120 MB/s</p> <p>■ ■</p>
 <p>Express Motile Dual end USB 3.0 and Micro-USB - Capacities: 8 - 32 GB - Read speed: 86 MB/s - Write speed: 12 MB/s</p> <p>■</p>	 <p>SuperCrypt 8-CH SSD Hardware Encrypted Performance - Capacities: 16 - 256 GB - Read Speed: 240 MB/s - Write Speed: 170 MB/s</p> <p>■ ■ ■</p>
 <p>Express ST4 Built in ECC and bad block management - Capacities: 16 - 64 GB - Read speed: 140 MB/s - Write speed: 50 MB/s</p> <p>■</p>	 <p>USB 3.0 DataGuardian Built-in password protection - Capacities: 8 - 32 GB - Read Speed: 85 MB/s - Write Speed: 40 MB/s</p> <p>■ ■</p>
 <p>Express ST2 USB 3.0 Performance at USB 2.0 Price - Capacities: 8 - 64 GB - Read speed: 67 MB/s - Write speed: 24 MB/s</p> <p>■</p>	 <p>Express ST1 Series Capless, slider design - Capacities: 8 - 256GB - Read Speed: 185 MB/s - Write Speed: 63 MB/s</p> <p>■</p>


■ Cache
 ■ Secure
 ■ 8 Channel
 ■ 4 Channel
 ■ 2 Channel
 ■ 1 Channel

What's a channel?

A channel of flash is a unit of flash memory in the USB drive. Having more channels means the drive can have more capacity and an increase in performance. Performance varies depending on drive capacity, system configuration, application and other factors.

USB 3.1 Portable RAIDDrive

Back up and carry large files on a portable USB RAIDDrive with incredibly fast transfer speeds.

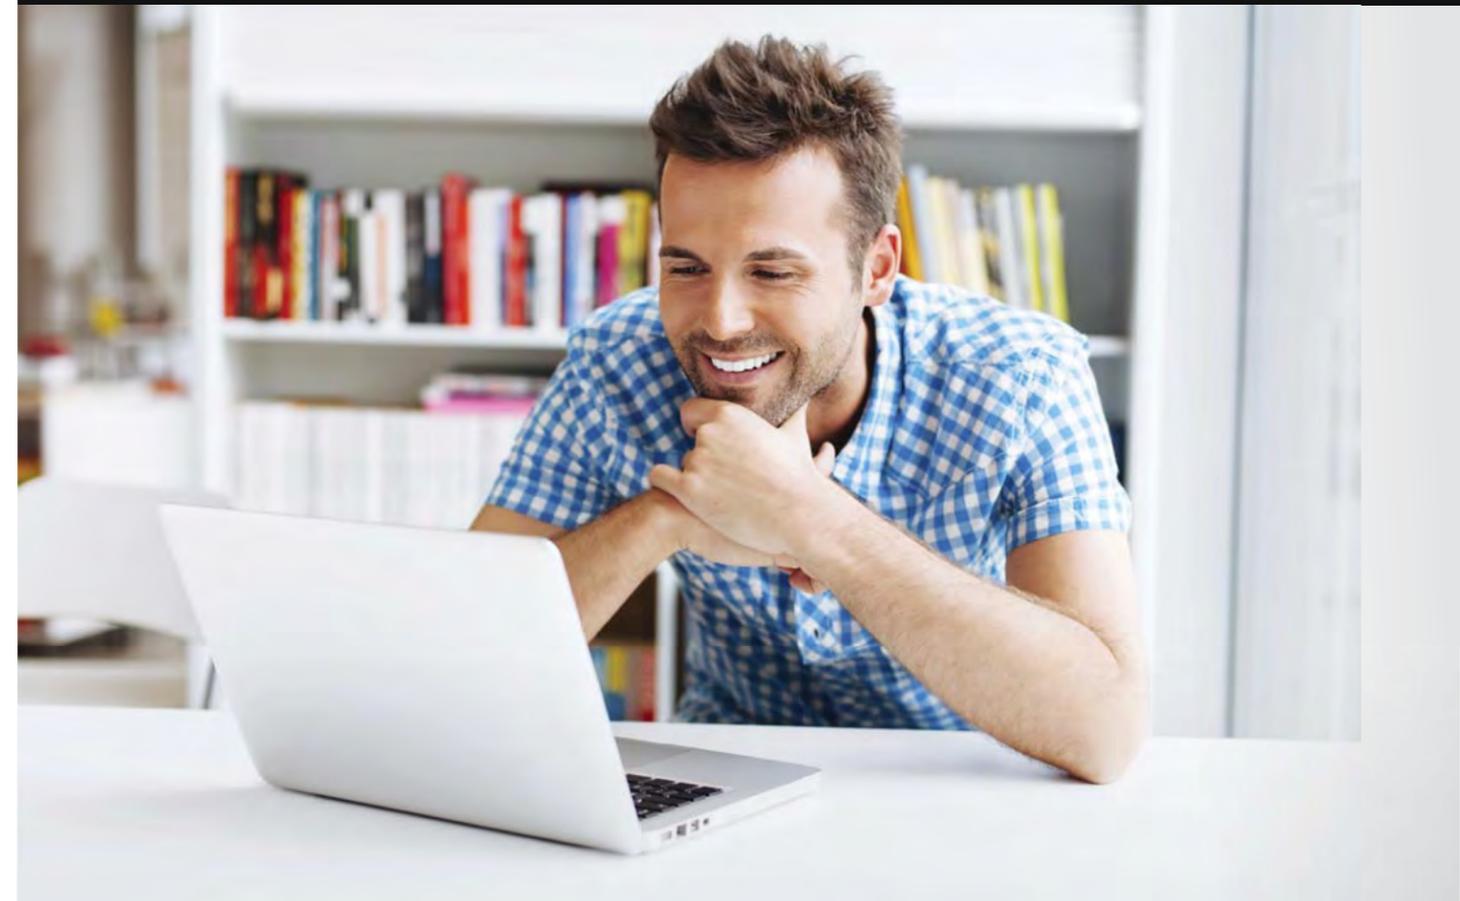

The USB 3.1 Portable RAIDDrive takes advantage of the increased bandwidth of the USB 3.1 interface to offer speeds of up to 750/700 MB/s read writes to a portable storage device. It can easily transfer large files within a matter of seconds and comes in capacities of up to 1TB.



Features

- Read up to 750 MB/s, Write up to 700 MB/s
- Capacities from 128 GB to 1TB
- Very high performance pocket-sized storage device
- Backwards compatible with USB 3.0 and 2.0
- 4 Channels
- Dimensions: 115.0 x 63.35 x 8.0mm

*Some devices may not support removable storage, please check with the product manufacturer first.

STT USB Drives - USB 3.0 Series



Express RC4

The USB 3.0 Express RC4 is an ultimate combination of speedy performance, price, and usability. The RC4's boot time is incredibly quick to deliver the best performance experience for the user.

Features

- Certified for Windows To Go
- 4-channel flash architecture
- Supports employee workforce deployments



SuperCrypt & SuperCrypt Pro

The SuperCrypt drives show an Access Point with a 32MB drive size when plugged in and is the only partition viewable if no password is entered.

Features

- Capacities up to 256GB
- Hardware encryption (128-bit ECB, Pro: 256-bit XTS)
- USB 3.0 speeds



Express Motile

USB 3.0 Express Motile combines USB 3.0 and microUSB technology into a single compact portable connector. Transferring data between a portable device and an USB is easy with the USB 3.0 Express Motile!

Features

- USB 3.0, microUSB interfaces
- Compatible with many portable devices
- Able to transfer and store data on the device



DataGuardian

The affordable and easy-to-use USB 3.0 DataGuardian features built-in password protection to help keep your files and private data secure, even if the drive is lost or stolen.

Features

- Built in password protection - no extra downloads or installations necessary
- Stops auto-run malware attacks
- ECC and bad block management



STT USB Drives - Pico Series

USB 3.0 Pico Series

Amazingly small in size, the USB 3.0 Pico packs an incredible amount of capacity into its compact, stylish casing. The USB 3.0 Pico drive is great for storing data, digital images, and videos. The design includes a space for attaching a keychain, lanyard, necklace chain, or other accessory. Water resistant and backwards compatible with USB 2.0, the USB 3.0 Pico is perfect for those seeking a versatile flash drive.



Features

- Weight less than 6g
- Fully compatible with USB 2.0 and 1.1
- Water resistant
- Over 80 press awards to date

Capacity	Part Number
16GB	ST3U16PICO
32GB	ST3U32PICO
64GB	ST3U64PICO



- Capacity: 16GB - 64GB
- Dimension: 33 X 12.3 X 4.6 mm
- Read: 72MB/s, Write: 28MB/s

Pico Series - World's smallest 64GB USB Drive...

Pico series USB drives are incredibly small and stylish flash drives offered in 2GB to 64GB capacities. You can easily attach it to your keychain and take your files with you wherever you go or plug it into a USB enabled car stereo and enjoy your music. Pico drives are water resistant too.

Pico A Swivel Lid

38.7 x 12.4 x 3.9mm



Pico C Ultra Small Capless

31.6 x 12.5 x 3.6mm



Pico C Gold Ultra Small Capless

31.6 x 12.5 x 3.6mm



Pico C Nickel Ultra Small Capless

31.6 x 12.5 x 3.6mm



Pico E Sliding lid

34.8 x 15.8 x 5.2mm



Pico E Gold Sliding lid

34.8 x 15.8 x 5.2mm



	2GB	4GB	8GB	16GB	32GB	64GB
A	STU2GPAS	STU4GPAS	STU8GPAS	STU16GPAS		
C	STU2GPCS	STU4GPCS	STU8GPCS	STU16GPCS		
C Gold		STU4GPCG	STU8GPCG	STU16GPCG	STU32GPCG	STU64GPCG
C Nickel	STU2GPCN	STU4GPCN	STU8GPCN	STU16GPCN	STU32GPCN	
E	STU2GPES	STU4GPES	STU8GPES	STU16GPES		
E Gold		STU4GPEG	STU8GPEG	STU16GPEG	STU32GPEG	

STT USB Drives - USB 2.0 Series

Pico mini USB Drives

Pico mini drives are amazingly small USB drives that weigh only a few grams, but can hold up to 4,000 songs. Pico mini drives are water resistant, colorful and trendy, and are offered in capacities of up to 64GB.

Pico mini A

Dimension: 31.8 x 15.0 x 3.2 mm



Pico mini B

Dimension: 30.5 x 15.4 x 3.4 mm



Pico mini C

Dimension: 31 x 16.2 x 5.2 mm



Pico mini D

Dimension: 30.5 x 15.4 x 3.9 mm



Features

- Water resistant
- Pico mini A (pink, green, blue, black)
- Pico mini B (pink, green, blue, grey)
- Pico mini C (slide design)
- Pico mini D (retractable design)

Capacity	Pico mini A	Pico mini B	Pico mini C	Pico mini D
2GB	STU2GMAP	STU2GMBP	STU2GMCK	STU2GMDU
4GB	STU4MAG	STU4MGBG	STU4GMCK	STU4GMDU
8GB	STU8MAB	STU8MGBB	STU8GMCK	STU8GMDU
16GB	STU16MAK	STU16MGBK	STU16GMCK	STU16GMDU
32GB	STU32MAK	STU32MGBK	STU32GMCK	STU32GMDU
64GB	STU64MAK	STU64MGBK	STU64GMCK	STU64GMDU

USB Flash Drives *Elite Series, Eco Series*



Pico Motile Capacity: 16GB - 64GB
Dimension: 27.0 x 15.0 x 6.3 mm

Capacity	Pico Motile
16GB	STU16PICM
32GB	STU32PICM
64GB	STU64PICM

M1 Capacity: 4GB - 16GB
Dimension: 22.6 x 14.9 x 8.5mm

Capacity	M1
4GB	STU4GM1W
8GB	STU8GM1W
16GB	STU16GM1W

CKB Capacity: 2GB - 64GB
Dimension: 40 x 25.9 x 3.7mm

Capacity	Silver	Nickel
2GB	STU2GCKB5	STU2GCKBN
4GB	STU4GCKB5	STU4GCKBN
8GB	STU8GCKB5	STU8GCKBN
16GB	STU16GCKB5	STU16GCKBN
32GB	STU32GCKB5	STU32GCKBN
64GB	STU64GCKB5	STU64GCKBN



RM Capacity: 2GB - 64GB
Dimension: 57.6 x 19 x 10.4 mm

Capacity	Black	Blue	Red	White
2GB	STU2GRMBK	STU2GRMBL	STU2GRMRR	STU2GRMRW
4GB	STU4GRMBK	STU4GRMBL	STU4GRMRR	STU4GRMRW
8GB	STU8GRMBK	STU8GRMBL	STU8GRMRR	STU8GRMRW
16GB	STU16GRMBK	STU16GRMBL	STU16GRMRR	STU16GRMRW
32GB	STU32GRMBK	STU32GRMBL	STU32GRMRR	STU32GRMRW
64GB	STU64GRMBK	STU64GRMBL	STU64GRMRR	STU64GRMRW



RM2 Capacity: 2GB - 64GB
Dimension: 61 x 19 x 11.6 mm

Capacity	Black	Blue	Red	White
2GB	STU2GRM2-K	STU2GRM2-B	STU2GRM2-R	STU2GRM2-W
4GB	STU4GRM2-K	STU4GRM2-B	STU4GRM2-R	STU4GRM2-W
8GB	STU8GRM2-K	STU8GRM2-B	STU8GRM2-R	STU8GRM2-W
16GB	STU16GRM2-K	STU16GRM2-B	STU16GRM2-R	STU16GRM2-W
32GB	STU32GRM2-K	STU32GRM2-B	STU32GRM2-R	STU32GRM2-W
64GB	STU64GRM2-K	STU64GRM2-B	STU64GRM2-R	STU64GRM2-W

Custom USB Drives *Your logo on it!*




We specialize in custom services for USB drives including:

- Custom Logo Printing
- Custom Packaging
- Preloaded Software
- Auto-play feature
- Custom Casing Color or Casing Design.
- AES-256 Encryption Options



Get Quote

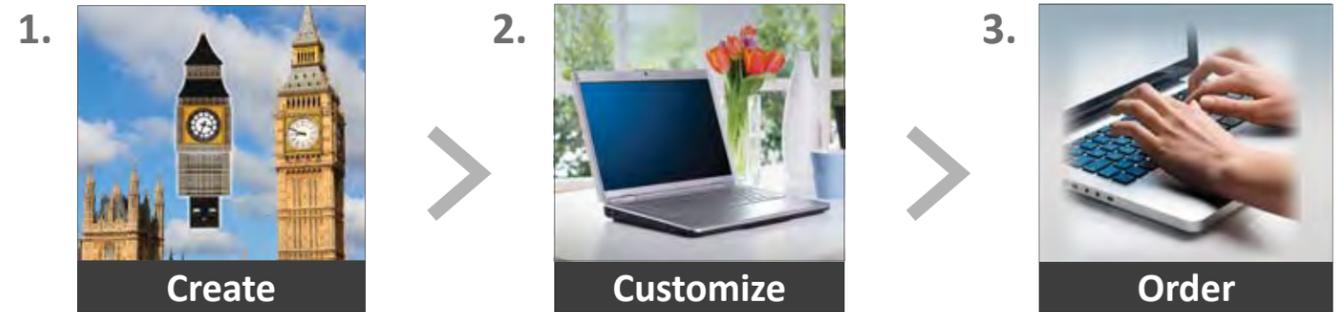

We have developed a simple quote process that will help you find the USB drive that fits your needs. It's as easy as 1,2,3. Visit our website. http://www.supertalent.com/custom_usb.php

Large selection of Custom USB Drives

Swivel Series



Traditional Case Series



Rubber Series



Special Edition Series



USB 3.0 Series



Choose a USB drive from our extensive collection...

To see more USB series, please visit www.supertalent.com

Flash Media Cards- CF Cards



Super Talent offers a full range of flash media cards to suit all your mobile storage needs. These products are extensively tested to ensure compatibility with a wide range of consumer gadgets.

• CFast Pro



CFast Pro cards are a 4x improvement in speed over the fastest 600x CF cards. With that kind of speed, photo and video capturing and download times are dramatically reduced. The CFast Pro card is great for use in high definition digital SLR and video cameras.

Capacities:	8GB, 16GB, 32GB, 64GB, 128GB, 256GB
Speeds:	Up to 480 MB/sec read, Up to 240 MB/sec write
Technical Details:	<ul style="list-style-type: none"> Flash type: MLC Dimensions (approx.): 36.4x42.8x3.3mm SATA III interface

• High Speed CF Cards

Fast and reliable, CF cards can be used in digital SLR cameras, digital video camcorders, as well as industrial applications.



Capacities:	2GB, 4GB, 8GB, 16GB, 32GB, 64GB
Speeds:	900x, 300x
Technical Details:	<ul style="list-style-type: none"> Impact resistant - operating shock rating of 2,000Gs Power requirements: 3.3V or 5.0V Supports ATA command set Dimensions (approx.): 42.8 x 36.4 x 3.3mm Weight: 13g (max)

• I-Temp CF Cards

Specifically designed for harsh operating conditions, Super Talent I-Temp CF cards are perfect for industrial applications and embedded systems.



Capacities:	2GB, 4GB, 8GB, 16GB, 32GB
Speeds:	900x, 300x
Technical Details:	<ul style="list-style-type: none"> Impact resistant - operating shock rating of 2,000Gs Operating temperature: -40° to 85° C Power requirements: 3.3V or 5.0V Supports ATA command set Dimensions (approx.): 42.8 x 36.4 x 3.3mm Weight: 13g (max)

Flash Media Cards- SD Cards

MicroSD Cards - Class 10



About four times smaller than the average SD card, the MicroSD card is primarily used with mobile handsets, the MicroSD Card also is supported by a variety of hand-held GPS devices, portable audio players, video game consoles and expandable USB flash memory drives.

Capacities:	4GB, 8GB, 16GB, 32GB
Technical Details:	<ul style="list-style-type: none"> Power requirements: 2.7V to 3.6V Operating temperature: -25° to 85° C Dimensions (approx.): 11mm x 15mm x 1mm Weight: 0.5g Optional SD adapter for use in SD devices

MicroSD Cards - Class 4



MicroSDHC cards are the same size as a MicroSD card but have the ability to store high-resolution images or videos. This ability allows the MicroSDHC to fit the needs of mobile enthusiasts.

Capacities:	2GB*, 4GB, 8GB, 16GB, 32GB
Technical Details:	<ul style="list-style-type: none"> Power requirements: 2.7V to 3.6V Operating temperature: -25° to 85° C Dimensions (approx.): 11mm x 15mm x 1mm Weight: 0.5g Optional SD adapter for use in SD devices

*2GB capacities are non-speed rated


**Approximations: results will vary based on file size, resolution, compression, bit rate, content, host device, pre-loaded files, and other factors.



DRAM Modules - DDR4 Memory

DDR4 Memory


- Double the speed of previous generation DDR3 DRAM
- 20% less power consumption and increased module density

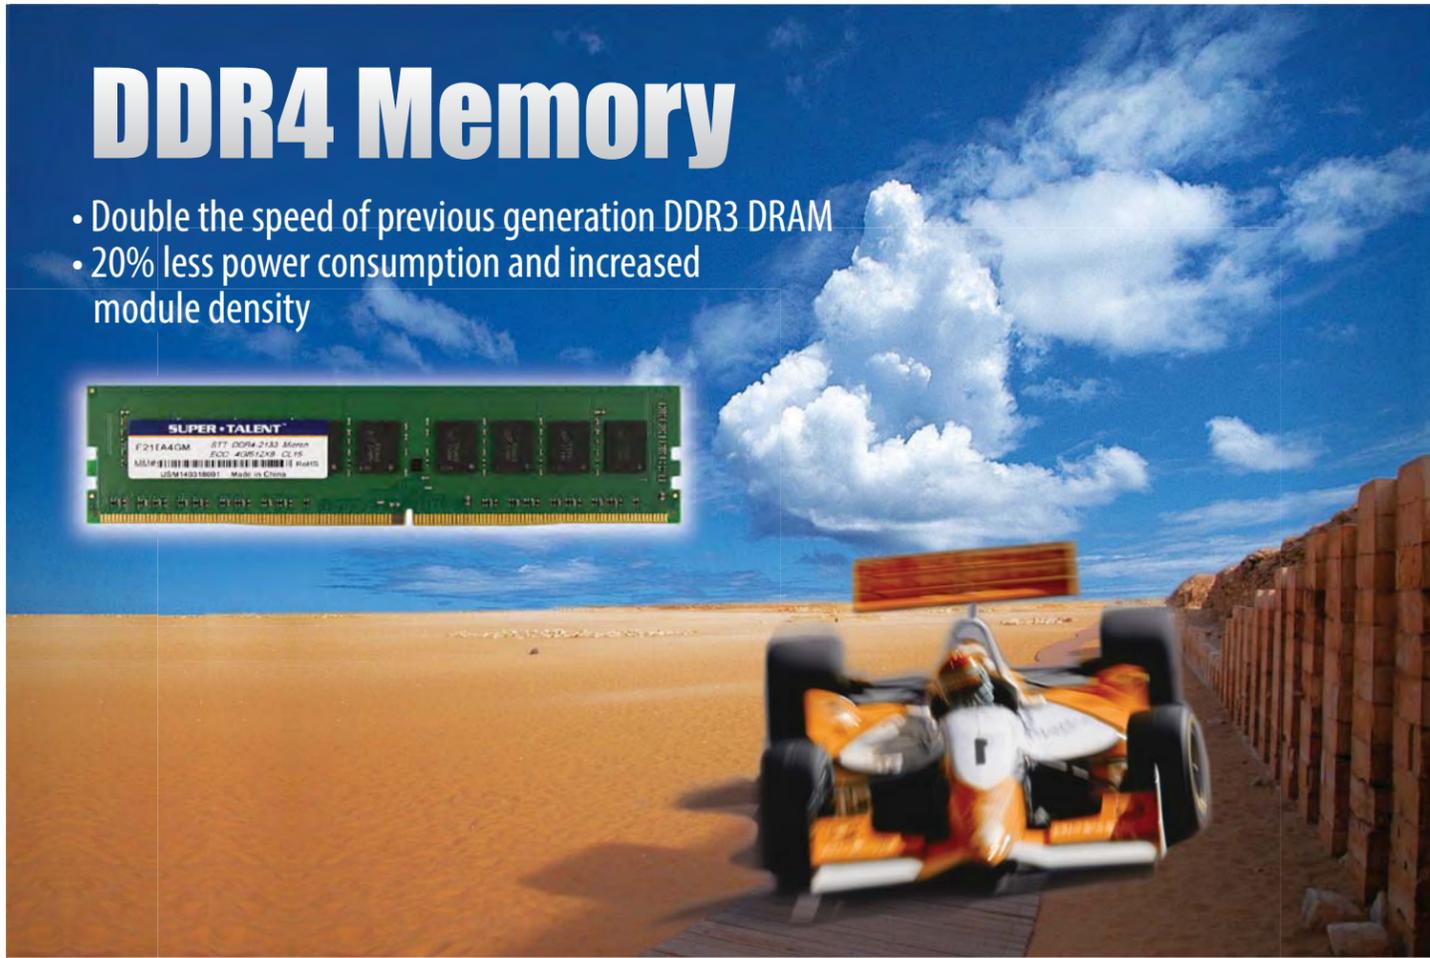

DDR4 DRAM is the next generation of DRAM which delivers speeds up to double that of the previous generation DDR3 DRAM. It consumes 20% less power, offers increased module density with 288-pin count, and has a significant bandwidth increase.

DDR4 ECC UDIMM, UDIMM, LRDIMM, RDIMM, SODIMM

- Capacities: 4 GB - 32 GB
- Voltage Support: 1.2V
- Speeds: 1866, 2133 Mhz

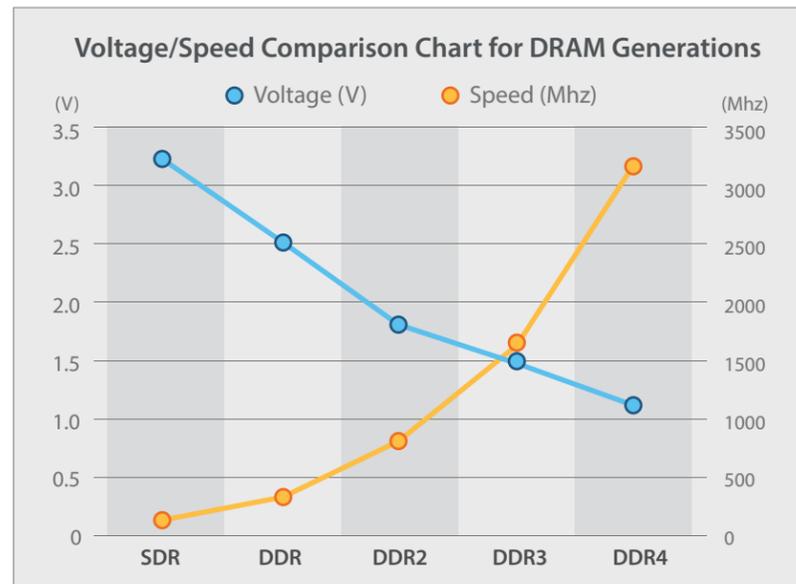

*This graph depicts how each generation of DRAM brings an improvement in performance while efficiently using resources.

DRAM Modules - Products

Server Memory

Super Talent server memory is designed to be fully compliant with JEDEC specifications to deliver ultimate reliability. Super Talent ensures compatibility with the latest server motherboards through extensive testing by the Super Talent engineering team.



DDR3 ECC Registered
Capacities: 1, 2, 4, 8, 16, & 32GB
Voltage support: 1.35V, 1.5V
Speeds: 1066, 1333, & 1600MHz
*VLP option available

DDR3 ECC UDIMM
Capacities: 1, 2, 4, & 8GB
Voltage support: 1.35V, 1.5V
Speeds: 1066, 1333, & 1600MHz
*VLP option available

DDR2 ECC Registered
Capacities: 256MB – 4GB
Voltage support: 1.8V
Speeds: 400, 533, 667, & 800MHz
*VLP option available

DDR ECC Registered
Capacities: 128MB – 2GB
Voltage support: 2.5V
Speeds: 266, 333, & 400MHz
*Dual Channel kits available

Network/ µServer/ Mini-Server Memory

Super Talent ensures compatibility with the latest hardware through extensive testing by the Super Talent engineering team. A wide selection of modules is available to choose from to suit small server needs.



DDR3 Mini-DIMM
Capacities: 2, 4, & 8GB
Voltage support: 1.35V, 1.5V
Speeds: 1066, 1333, & 1600MHz
*Registered or ECC unbuffered DIMMs



DDR3 SO-DIMM
Capacities: 1, 2, 4, & 8GB
Voltage support: 1.35V, 1.5V
Speeds: 1066, 1333, 1600MHz
*Registered or ECC unbuffered DIMMs

Desktop Memory

Super Talent desktop memory is fully compliant with industry standards to ensure compatibility with motherboards and OEM systems.



DDR3 UDIMM
Capacities: 1, 2, 4, 6, & 8GB
Voltage support: 1.35V, 1.5V
Speeds: 1066, 1333, 1600MHz
*Dual, Triple, and Quad Channel kits available



DDR3 SO-DIMM
Capacities: 1, 2, 4, & 8GB
Voltage support: 1.35V, 1.5V
Speeds: 1066, 1333, 1600MHz

Apple® Compatible Memory

Super Talent memory modules are designed for 100% compatibility with the latest Mac computers. As an Apple Validation Partner, Super Talent tests its memory on all the leading Apple systems in Apple's validation labs.



DDR3 SO-DIMM
(for Mac Mini, MacBook Pro, & iMac)
Capacities: 1, 2, 4, & 8GB
Voltage support: 1.35V, 1.5V
Speeds: 1066, 1333, 1600MHz
*Certified in Apple Compatibility Labs

DDR3 ECC UDIMM
(for Mac Pro)
Capacities: 1, 2, 4, & 8GB
Voltage support: 1.5V
Speeds: 1066 & 1333MHz
*Certified in Apple Compatibility Labs

Green Memory Do more with less.

- Uses nearly 40% less PCB material than a standard-height module
- Requires less cooling
- Fully JEDEC compliant and 100% tested
- Low Voltage (1.35V)



Leading studies suggest that the explosive growth in computing power has been matched by growing power demands and cooling costs. Experts predict that power-related costs of data centers will soon be greater than the cost of IT equipment itself. This led us to create a line of green memory that uses fewer raw materials, consumes less energy, and requires less cooling, with absolutely no tradeoffs in performance or price. When multiplied by the hundreds of thousands of memory modules we produce monthly, this has an enormous environmental impact.

Our selection of Green Memory includes:

- DDR2 & DDR3 modules
- Energy saving 1.35V DDR3 DIMMs (backward compatible in 1.5V systems)
- Very Low Profile modules (0.72"/0.74" tall) perfect for blade systems
- Support for speeds of 800MHz – 1600MHz (DDR3) and 400MHz – 800MHz (DDR2)
- Densities up to 8GB (DDR3) and 4GB (DDR2)



VLP memory (left) vs. standard memory (right)

VLP DDR3 RDIMM



VLP DDR3 SODIMM



VLP DDR3 ECC UDIMM



VLP DDR2 RDIMM



DDR3 Apple-compatible DIMMs

Mac Mini

(1.66/1.83GHz, Core2 Duo 2.0/2.26GHz)
Up to 2GB DDR3 1066MHz SO-DIMM

iMac

(Intel Core2 Duo 20/24/27-inch DDR3)
Up to 8GB DDR3 1600MHz SO-DIMM
*1.35V modules available

Mac Pro

(MC561)
Up to 8GB DDR3 1333MHz ECC UDIMM

13" MacBook Pro

(MC700, MC724, MD101)
Up to 8GB DDR3 1600MHz SO-DIMM
*1.35V modules available

15" MacBook Pro

(MD104)
Up to 8GB DDR3 1600MHz SO-DIMM
*1.35V modules available

17" MacBook Pro

(MC725)
Up to 4GB DDR3 1333MHz SO-DIMM

Apple-compatible DDR2 DIMMs

MacBook/MacBook Pro

1 & 2GB DDR2 SO-DIMM

iMac G5

1 & 2GB DDR2 UDIMM

DISCLAIMER: Actual usable memory capacity may vary. 1MB equals 1 million bytes; 1GB equals 1 billion bytes.

Why Super Talent?

After determining how much memory you need, you need to review vendors that sell your specific memory type. Although there are many companies that sell Apple-certified memory, Super Talent is a Mac memory expert. What separates Super Talent from the generic memory supplier is that we do extensive validation testing on all Mac modules. By the time you get your Apple certified memory, it is 100% tested and guaranteed 100% compatible.

Super Talent has Apple-compatible DIMMs!

Guaranteed 100% Compatible!

Super Talent memory modules are designed for 100% compatibility with Mac® computers. We test our memory on all the leading Apple systems in Apple's Compatibility Lab.



Apple compatible DDR3 Memory

